

GE OSMONICS
MEMBRANE
ELEMENTS



GE Osmonics

GE Osmonics Reverse Osmosis Residential Products

GE Osmonics Household Water Group, with its superior line of products, has been at the forefront of the water treatment industry for three decades, and we continue to lead the way with our ongoing research and development. Our commitment to quality, customer service, and leading-edge technology means that you can expect reliable products that meet and exceed your water-treatment needs.

GE Osmonics is dedicated to creating tomorrow's fluid solutions today.



A Full Line of Membrane Elements Built on GE Osmonics Products

GE Osmonics brand membranes are built on a strong tradition of Reverse Osmosis technology. Our residential and light commercial membranes have led the industry for years, featuring superior design and high quality. Over thirty years of combined Reverse Osmosis experience ensures that you will have the very best in residential RO when you select membranes from GE Osmonics Household Water Group.

Innovative, Proven Membrane Technology Ensures RO Efficiency

Unlike conventional filtration which can be maintenance-intensive, costly, and environmentally unfriendly, membrane-separation technology employs crossflow filtration where captured impurities on the membrane are constantly swept away by the concentrate stream. Thus the membrane surface is continuously cleaned, prolonging the life of the membrane and reducing maintenance costs.

In residential applications, RO membranes are used to purify varying qualities of saline water. In a common application, the appropriate RO membrane element is housed inside a pressure vessel that accepts inflowing, pressurized saline feedwater. Crossflow filtration across the membrane then divides the flow into two outflow streams: the cleansed permeate feed and the concentrate or reject stream.


Commercial Applications Take Advantage of GE Osmonics Membranes

In addition to residential applications, our membrane elements are available for commercial applications, including:


- Drinking water for restaurants
- Drinking water vending machines
- Aquarium water treatment
- Softened water for homes, hotels, commercial laundries and car washes
- Post-treatment of deionized water
- Pure water for pharmaceuticals, laboratories and electronics
- Hemodialysis

Residential/Commercial Products

Size Specifications

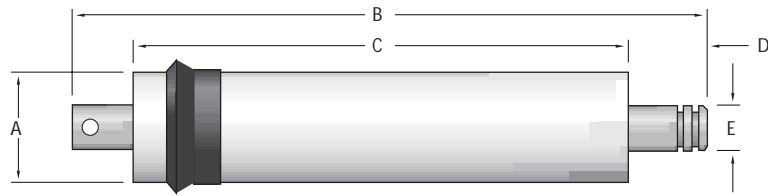

MODEL	A	B	C	D	E
TFM-18	1.50	11.75	10.00	0.875	0.678
TFM-24	1.80	11.75	10.00	0.875	0.678
TFM-36	1.80	11.75	10.00	0.875	0.678
TFM-50	1.80	11.75	10.00	0.875	0.678
TFM-75	1.80	11.75	10.00	0.875	0.678
TFM-100	1.80	11.75	10.00	0.875	0.678
CTA-10	1.80	11.75	10.00	0.875	0.678
CTA-16	1.80	11.75	10.00	0.875	0.678
HL1812	1.80	11.75	10.00	0.875	0.678

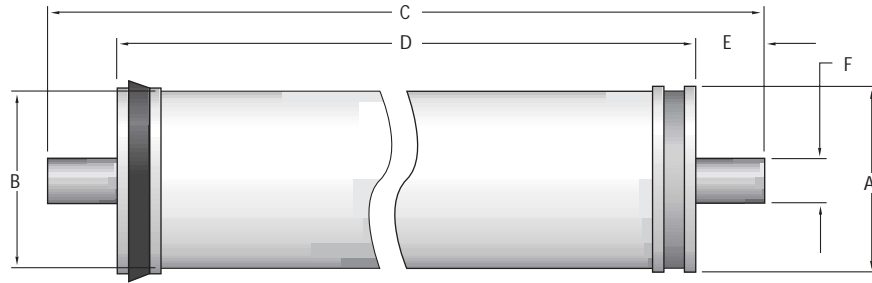


MODEL	A	B	C	D	E	F
AG2514TF	2.4	2.3	14.0	11.8	1.1	0.75
AG2521TF	2.4	2.3	21.0	18.8	1.1	0.75
AG2540TF	2.4	2.3	40.0	37.8	1.1	0.75
AG4014TF	3.88	3.75	14.0	12.0	1.0	0.75
AG4021TF	3.88	3.75	21.0	19.0	1.0	0.75
AG4040TF	3.88	3.75	40.0	38.0	1.0	0.75
AK2514TF	2.4	2.3	14.0	11.8	1.1	0.75
AK2521TF	2.4	2.3	21.0	18.8	1.1	0.75
AK2540TF	2.4	2.3	40.0	37.8	1.1	0.75
AK4014TF	3.88	3.75	14.0	12.0	1.0	0.75
AK4021TF	3.88	3.75	21.0	19.0	1.0	0.75
AK4040TF	3.88	3.75	40.0	38.0	1.0	0.75
HL2514TF	2.4	2.3	14.0	11.8	1.1	0.75
HL2521TF	2.4	2.3	21.0	18.8	1.1	0.75
HL2540TF	2.4	2.3	40.0	37.8	1.1	0.75
HL4014TF	3.88	3.75	14.0	12.0	1.0	0.75
HL4021TF	3.88	3.75	21.0	19.0	1.0	0.75
HL4040TF	3.88	3.75	40.0	38.0	1.0	0.75

All size specifications are in U.S. inches.

How the Membrane System Works

The spiral membrane is constructed of one or more membrane envelopes wound around a perforated central tube. The permeate passes through the membrane into the envelope and spirals inward to the central tube for collection.

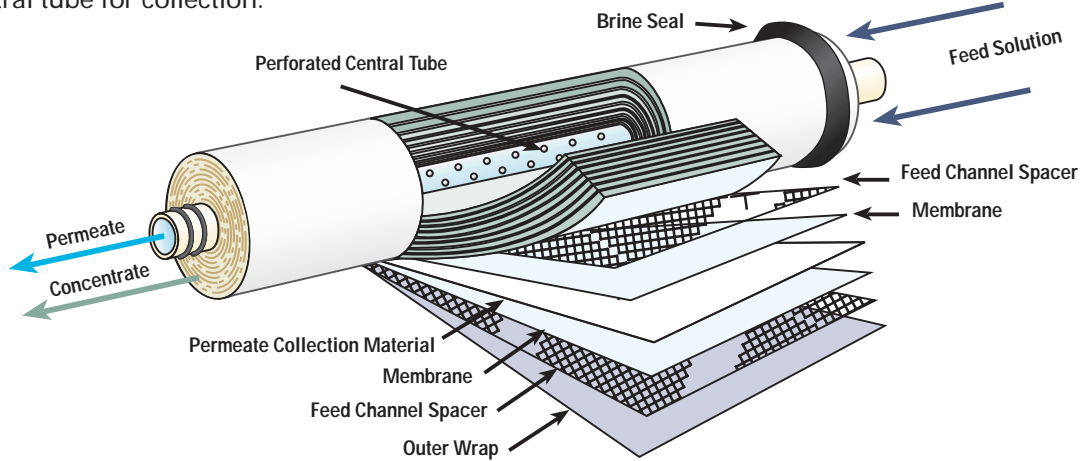

The illustration above represents a simplified spiral-wound membrane element. Recovery can be as high as 90% and systems may be capable of chemical cleaning in place (CIP).

Residential Thin-Film Membrane RO Elements

PART NUMBER	MODEL	AVERAGE NaCl REJECTION (%)	PERMEATE FLOW gpd @ 60 psi
1220188	TFM-18	98.0	18
1220189	TFM-24	98.0	24
1220190	TFM-36	98.0	36
1204694	TFM-50	98.0	50
1204487	TFM-75	96.0	75
1221122	TFM-100	96.0	100



Specifications are based on 500 mg/L NaCl solution at 65 psi inlet pressure (4.1 bar), 77°F (25°C), 15% recovery after 24 hours. Individual element flux may vary ± 15%.

NOTE: Carbon Pre-filtration recommended on chlorinated water supplies.

Residential Cellulose Acetate Membrane RO Elements

PART NUMBER	MODEL	AVERAGE NaCl REJECTION (%)	PERMEATE FLOW gpd @ 60 psi
1201330	CTA-10	95.0	10
1201332	CTA-16	95.0	16



Specifications are based on 500 mg/L NaCl solution at 65 psi inlet pressure (4.1 bar), 77°F (25°C), 15% recovery after 24 hours. Individual element flux may vary ± 15%.

Commercial Thin-Film RO Elements

PART NUMBER	MODEL	AVERAGE NaCl REJECTION (%)	PERMEATE FLOW gpd @ 225 psi
1206718	AG2514TF	99.4	180
1206719	AG2521TF	99.4	300
1206729	AG2540TF	99.4	710
1206748	AG4014TF	99.4	550
1206750	AG4021TF	99.4	1050
1206774	AG4040TF	99.4	2200



Specifications are based on 2000 mg/L NaCl solution at 225 psi net pressure (15.5 bar), 77°F (25°C), 15% recovery after 24 hours. Individual element flux may vary ± 15%.

NOTE: Carbon Pre-filtration recommended on chlorinated water supplies.

Commercial Low-Pressure, Thin-Film RO Elements

PART NUMBER	MODEL	AVERAGE NaCl REJECTION (%)	PERMEATE FLOW gpd @ 107 psi
1220978	AK2514TF	99.0	180
1206799	AK2521TF	99.0	300
1206802	AK2540TF	99.0	710
1220979	AK4014TF	99.0	550
1206812	AK4021TF	99.0	1050
1206816	AK4040TF	99.0	2200



Specifications are based on 500 mg/L NaCl solution at 107 psi net pressure (7.4 bar), 77°F (25°C), 15% recovery after 24 hours. Individual element flux may vary ± 15%.

NOTE: Carbon Pre-filtration recommended on chlorinated water supplies.

Nanofiltration Elements

PART NUMBER	MODEL	AVERAGE MgSO ₄	PERMEATE FLOW gpd @ 100 psi
1207225	HL1812	95.0	140
1207228	HL2514TF	98.0	220
1207229	HL2521TF	98.0	380
1207231	HL2540TF	98.0	860
1220989	HL4014TF	98.0	700
1220991	HL4021TF	98.0	1280
1220990	HL4040TF	98.0	2720




Specifications are based on 2000 mg/L MgSO₄ solution at 100 psi net pressure (6.9 bar), 77°F (25°C), 15% recovery after 24 hours. Individual element flux may vary ± 15%.

TFM - 100

Testing Data

DISSOLVED SOLUTION (@2HRS)	INFLUENT (mg/L)	SAMPLE	RESULT (mg/L)	REJECTION %
TDS	494	32019-2 2265-3	11.5	98
Nitrate	9.4	32019-2 2265-4	0.73	92
Fluoride	130	32019-2 2265-3	1.8	99
Chloride	98	32019-2 2265-3	0.92	99
Arsenic	0.80	32019-2 2265-3	0.0016	99

Performance vs. Pressure

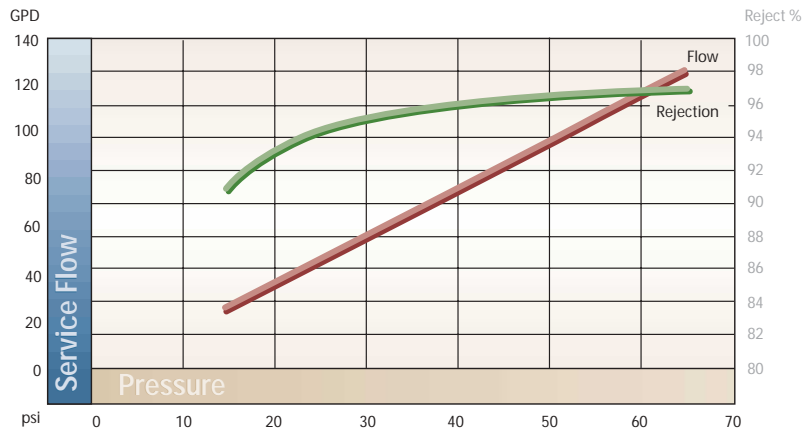

Call **(262) 238-4400** for additional information, **(800) 279-9404** in the U.S., or visit **www.osmonics.com**



GE Osmonics



Corporate Headquarters

5951 Clearwater Drive
 Minnetonka, MN
 55343-8995
 USA
 (952) 933-2277 Phone
 (952) 933-0141 Fax

North American Sales

5730 North Glen Park Road
 Milwaukee, WI
 53209-4454
 USA
 (262) 238-4400 Phone
 (262) 238-4402 Fax

Euro/Africa Sales

230 rue Robert Schuman
 ZA des Uselles
 F-77350 Le Mée sur Seine
 FRANCE
 +33 1 64 10 2000 Phone
 +33 1 64 10 3747 Fax

Asia/Pacific Sales

1044/8 SOI 44/2
 Sukhumvit Road Prakanong
 Bangkok 10110
 THAILAND
 +66 2 38 14213 Phone
 +66 2 39 18183 Fax